


ILEX
Behind - the - Lens
SHUTTERS

For
Studio and View
Cameras

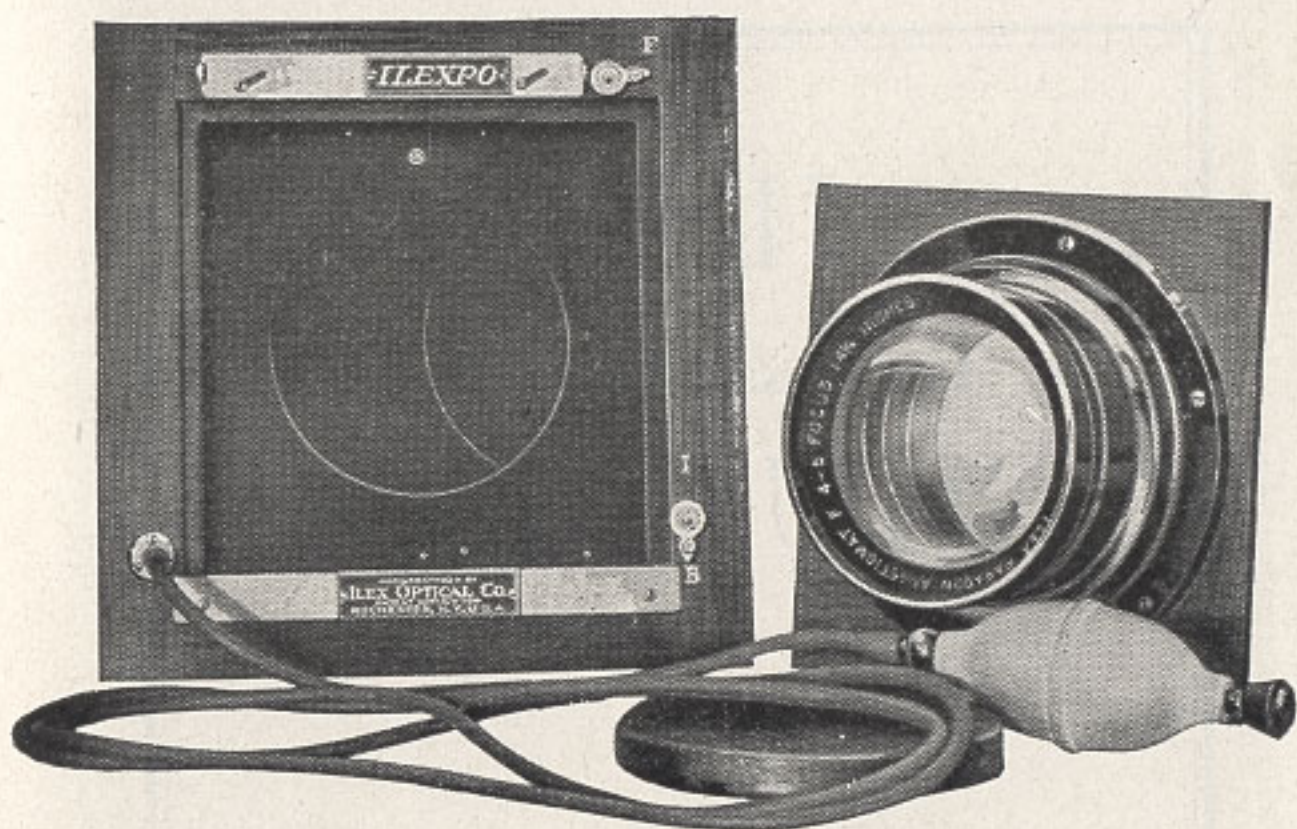

Innumerable lens equipments can be used on the one shutter.

ILEXPO SHUTTERS

ILEX, always striving to anticipate the needs of the photographer, has perfected in the Ilexpo Shutter a Behind-the-lens type, which needs but a description and outline of its features to impress its necessity on the studio operator.

The Ilexpo is built into the standard 9x9" and 10x10" front boards, which simplifies attachment to the Studio camera. Remove present front board and fit shutter in its place.

Fitted with removable insert boards to which lens barrel is attached, the interchanging of lenses on the same shutter is as easily accomplished as inserting a plate.

To Operate

TO operate set top indicator at "F" for focusing and bottom indicator at the exposure desired "B" (bulb) or "I" (instantaneous). After focusing, pressure of bulb closes shutter blades, which is then ready for the exposure.




Instructions for Exposure

FOR long exposures, set at "B" and hold pressure until expiration of time limit. For short exposure set at "I". Instantaneous exposures are regulated by pressure of bulb; a quick pressure renders fast speed; slower pressure correspondingly slower speed.

Truly an efficient and economical studio necessity. Its simplicity of construction and operation will be appreciated by every photographer.

Bulb and tubing furnished with each Ilexpo Shutter.

No.	Light Aperture	Lens Opening	Outside Dimensions	Price
1	4-1/8"	4 1/2"	9" x 9"	\$20.00
2	4-1/8"	4 1/2"	10" x 10"	22.00

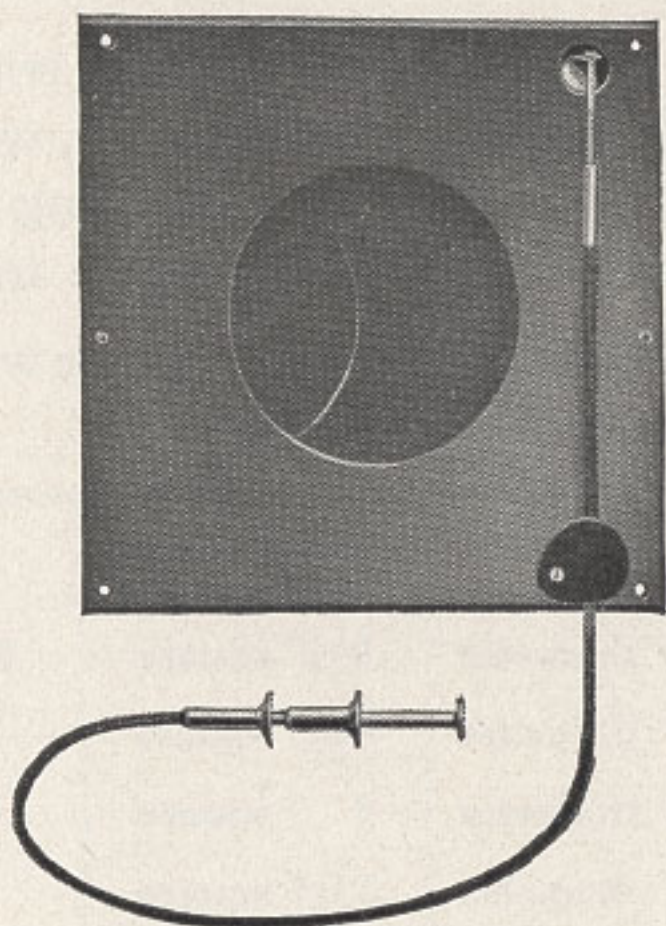

Ilexview Shutter

A behind-the-lens type adaptable to view and studio cameras with small front boards.

Simple in construction and design, there is no complicated mechanism to become faulty or defective.

The Ilexview Shutter is attached to the back of the camera front board. Lens is fitted to this front board in the usual manner.

Shutter operates at Time exposure only, and is equipped with a double action wire release. Lower sliding sleeve of wire release opens the shutter blades and locks them in the open position for focusing.

This sleeve pressed back with top trigger to its original position closes shutter, which is then ready for exposure by operating release with the top trigger in the usual manner. Dependable, efficient, silent. Large working aperture with limited overall.

No.	Light Aperture	Outside Dimension	Price
1	1½" diameter	3⅛" square	\$5.00
2	2 " diameter	4⅛" square	6.50
3	2½" diameter	5 " square	7.00
4	3 " diameter	5⅞" square	7.50



Ilex Stereoscopic Shutter

THE Ilex Line now also includes a Stereo shutter, which is automatic in action and has speeds ranging from 1 second to 1/100th second and T. & B. On special order we can furnish any desired lens distance.

The standard distance is 3½ inches.

Price \$27.50



Ilex Optical Company
Rochester, N. Y., U. S. A.

*Pioneers in the successful making and marketing of
shutters with the revolutionizing wheel retarder.*