


Plaubel


Peco

Junior

6,5x9

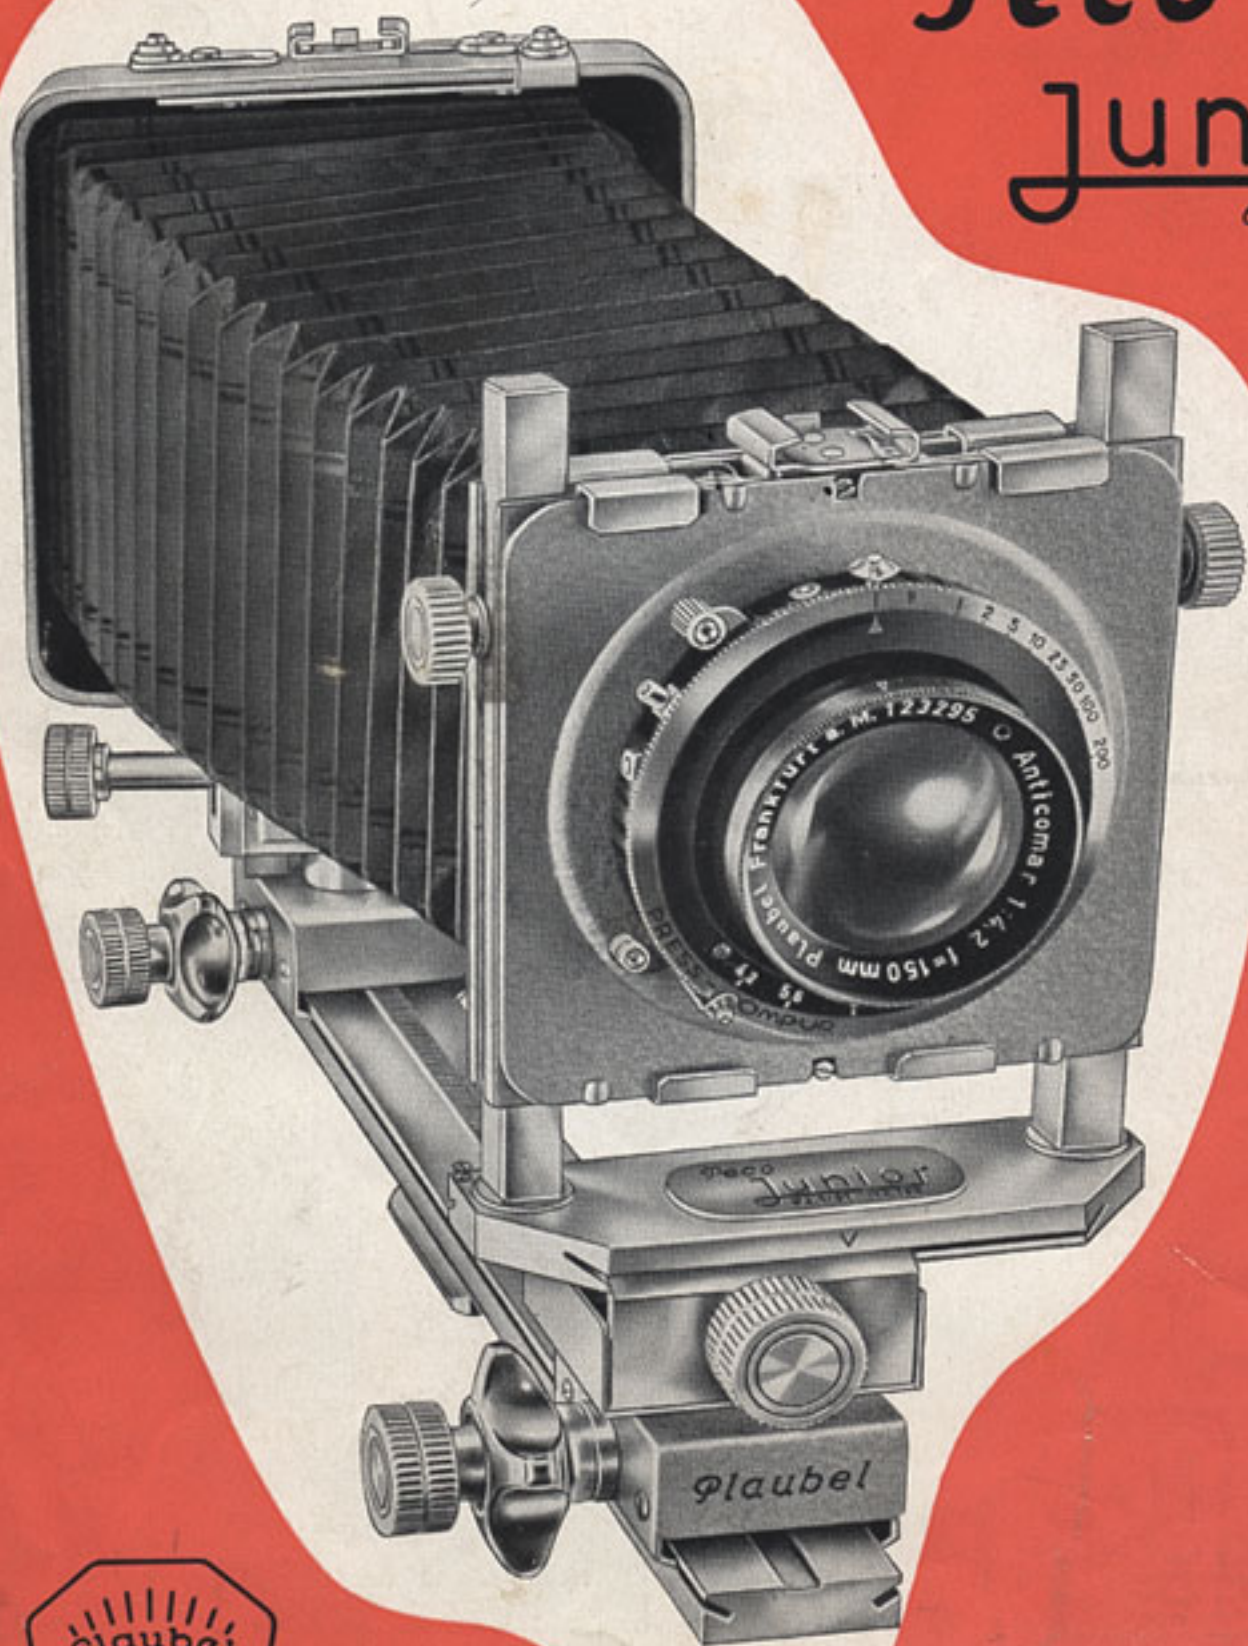

1. Clamping screw for cross movement
2. Lens panel
3. Clamping screw for rise-and-fall movement
4. Viewfinder shoe
5. Locking bar for lens panel
6. Locking device for bellows
7. Interchangeable bellows
8. Lock for plate-holder adaptor
9. Plate-holder adaptor
10. Spirit level
11. Optical bench (monorail) with rack
12. Locking screw of joint for swinging the focusing screen
13. Tripod bush
14. Locking screw for focusing drive knob
15. Focusing drive knob

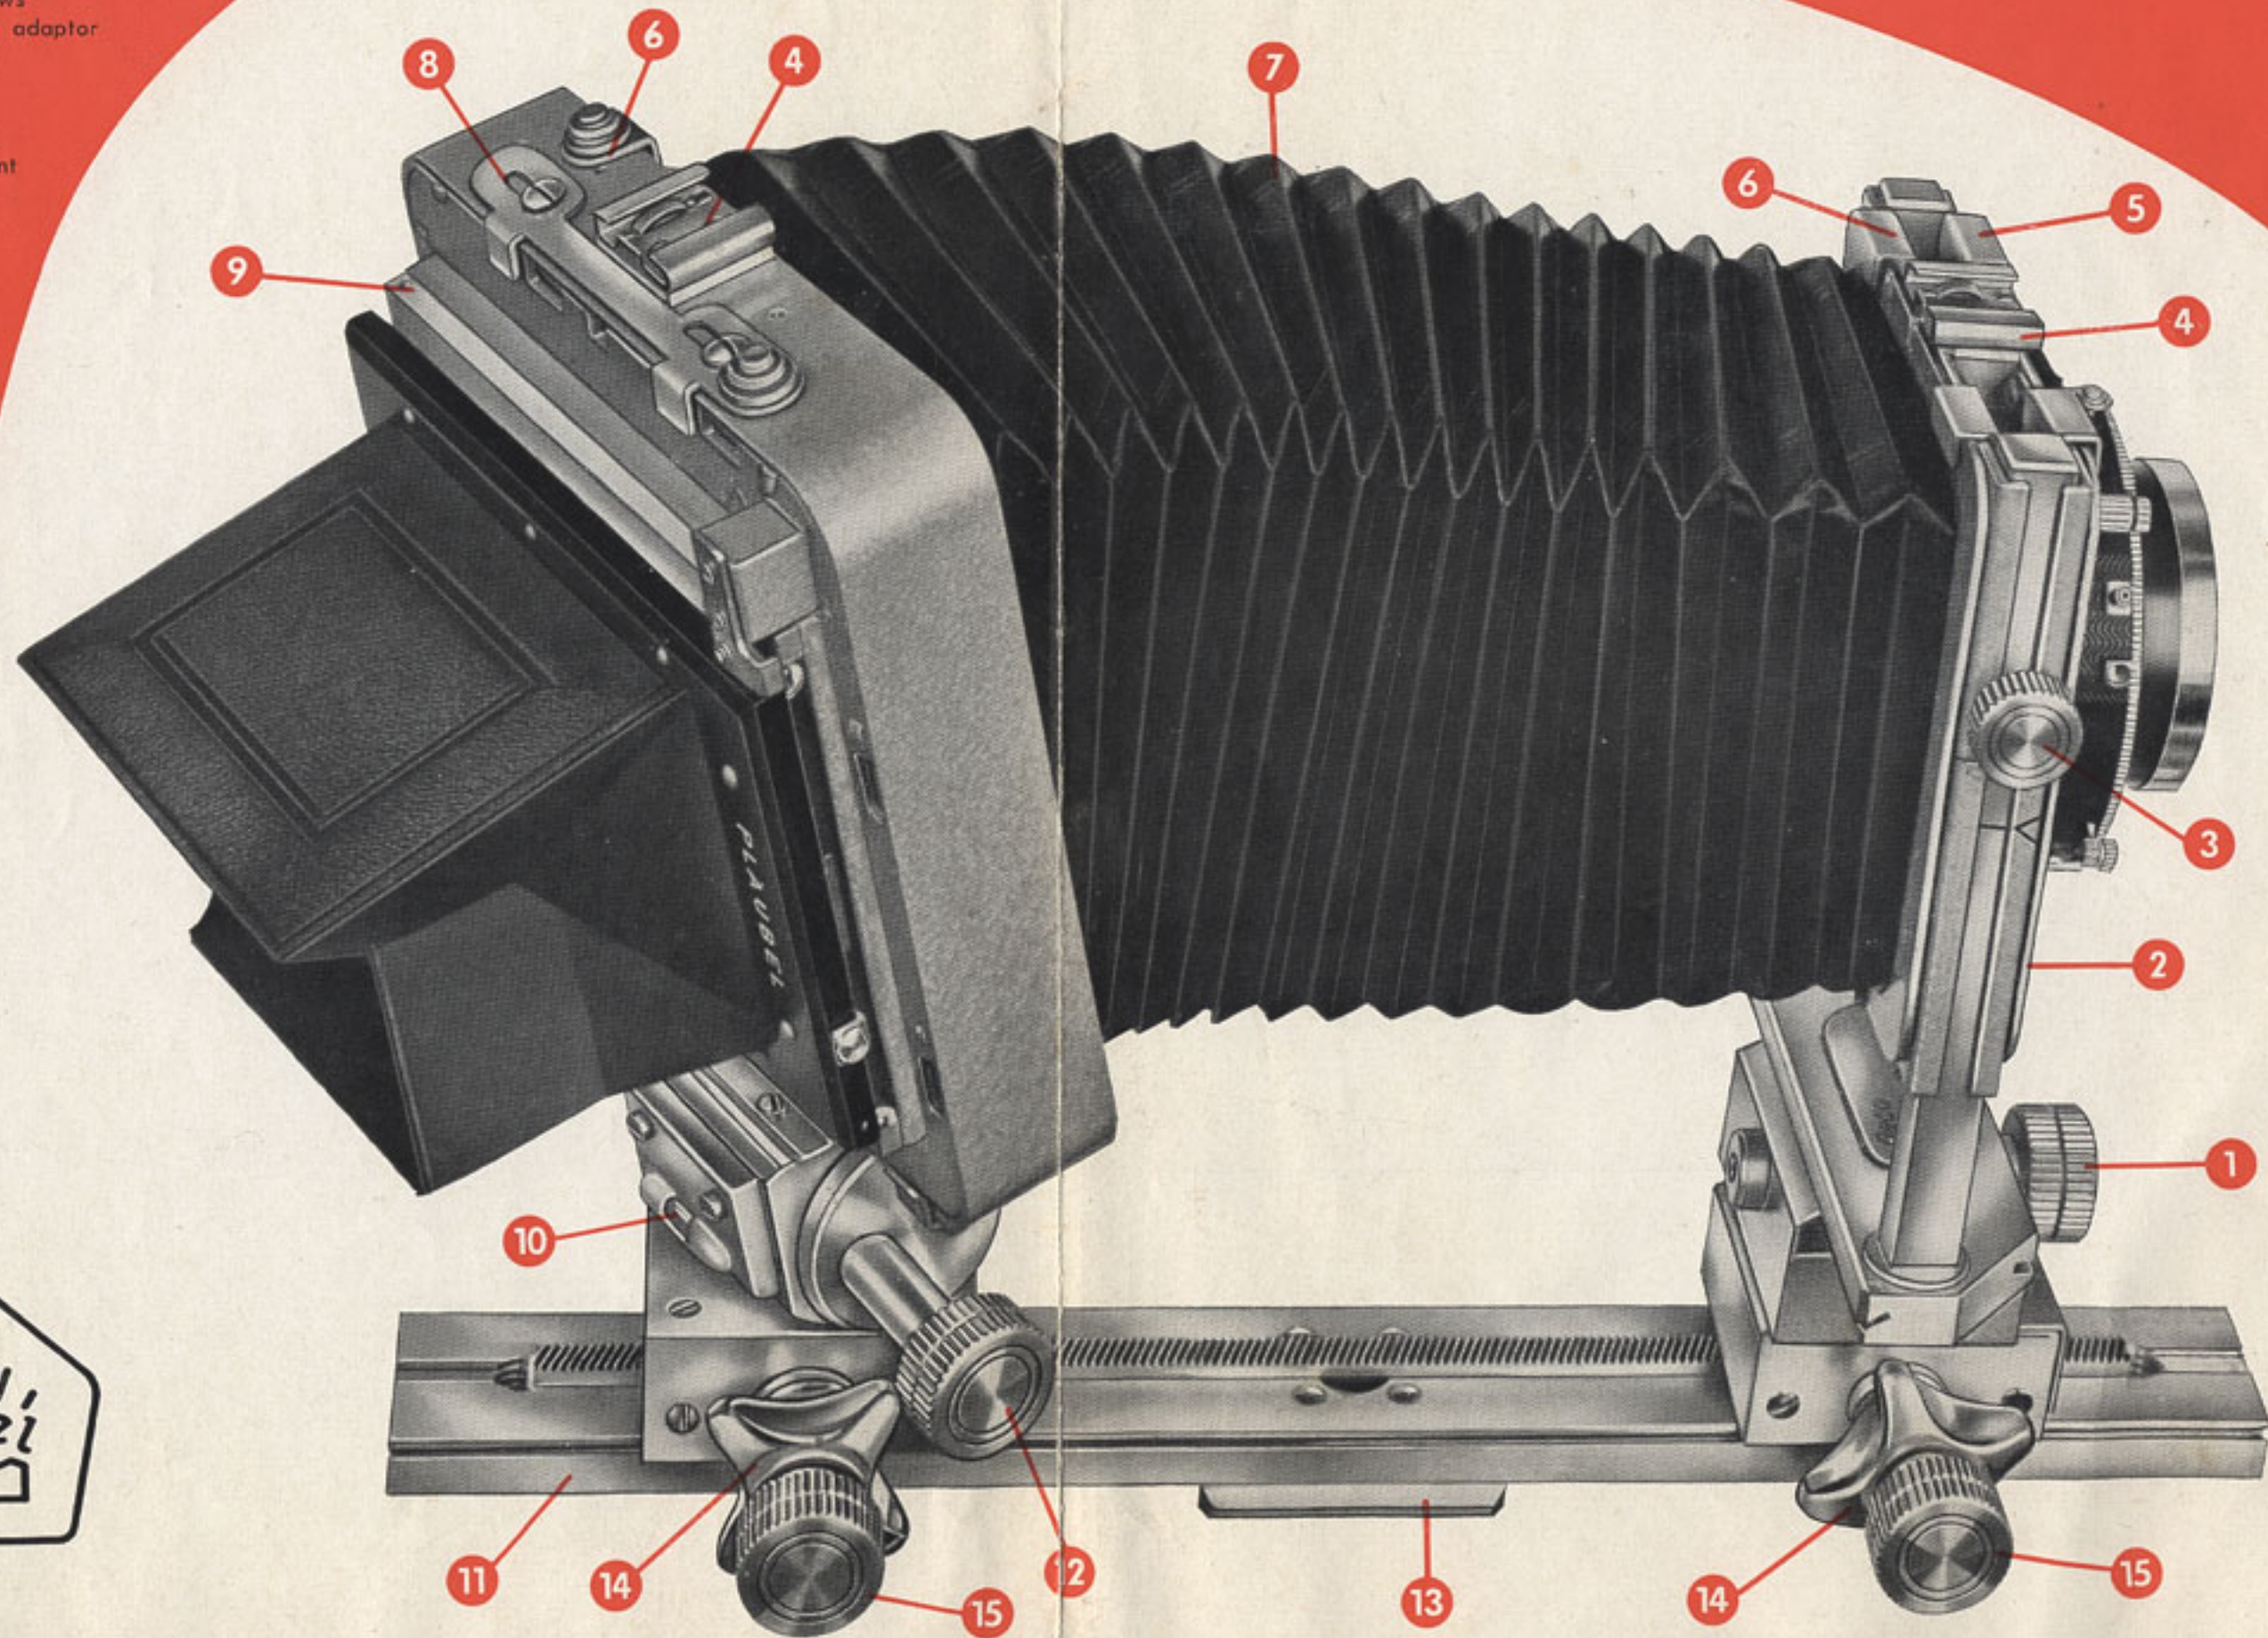

Instructions

for use

Rising front ①

Cross front ②

Falling front ③

These are movements of the lens for controlling perspective

Tilting ④

Swinging ⑤

of the focusing screen restores the depth of field

Combining these movements offer the widest possibilities of image control

These movements,

exceptionally generous for a 6.5 x 9 cm studio camera, make it possible to exploit to the full the 100° angle of the f/8,65 mm Super Angulon, even when coupled with the special soft bellows.

Tilt: 35° Swing: 65°

Normal bellows:

Maximum extension 250 mm

Minimum extension 62 mm

Wide-angle bellows:

Maximum extension 130 mm

Minimum extension 62 mm

Lens-panel movements:

Rise 55 mm

Fall 28 mm

Cross (right) 45 mm

Cross (left) 45 mm

Camera dimensions:


Length 280 mm

Height 210 mm


Width 126 mm

Weight of camera, with lens panel and focusing screen frame: 1460 gr.


Makes free-hand camera work possible!

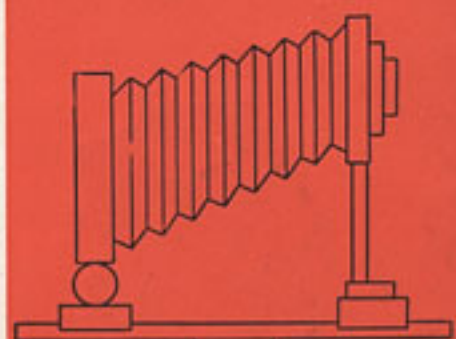


1

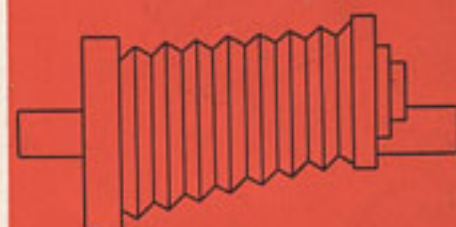


2

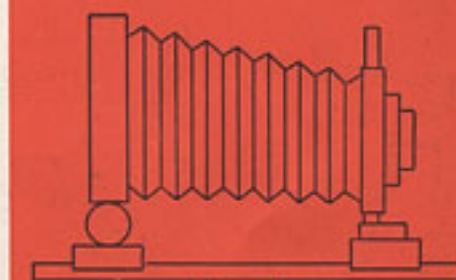

3

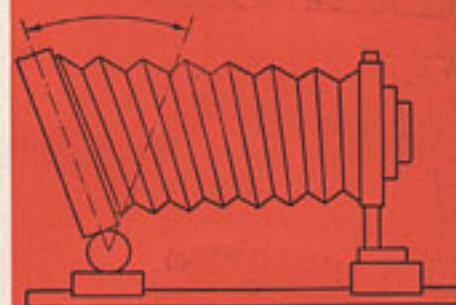


4

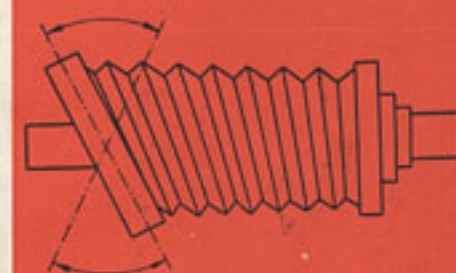

5

The Peco Junior System

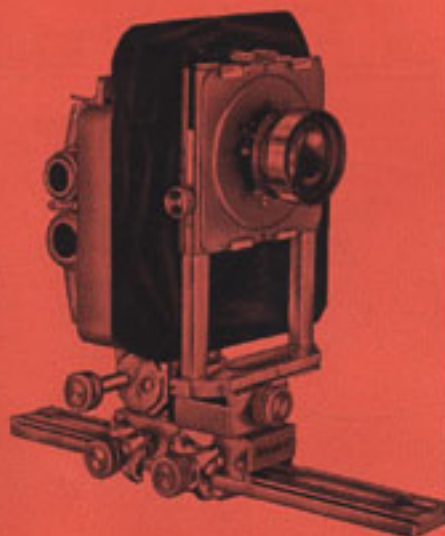

PECO JUNIOR with Makina-grove adaptor, ground glass screen frame and 1 lens panel	Order No. PJ	1/01
Roll film adaptor 6 x 9 cm, with counter	RK	4/01
Roll film adaptor 6 x 6 cm, with counter	RK	4/02
Miniature film adaptor 24 x 36 mm, with counter		111/7
RADA roll film adaptor 6 x 9 cm, without counter, with lock	RK	2/01
Insertion mask, 4.5 x 6 cm, for above	RK	2/75
Insertion mask, 6 x 6 cm, for above	RK	2/76
Plateholder, 6.5 x 9 cm, Makina-grove		113
Sheet film insert for above		165
Ground-glass screen frame, without focusing hood	MS	2/06
Focusing hood for ground-glass screen frame	MS	2/07
Adaptor with spring-loaded ground-glass screen, 6.5 x 9 cm, for universal darkslide 6.5 x 9 cm with normal double grove	PJ	1/325
Universal darkslide, 6.5 x 9, normal double grove	SG	1/380
Adaptor with spring-loaded ground-glass screen 2 1/4 x 3 1/4", suitable for U.S. double darkslide	PJ	1/326
Soft wide-angle bellows	PJ	1/431
Special lens panel with lbsor I and quick change ring for Makina-quick change lenses	PJ	1/442
Frame-finder	PJ	1/301
Special handle w/wire release and bakelite cover	PJ	1/450
Leather Hold-all for PECO JUNIOR, with lenses, several darkslides, etc.	KFJ	1/01
Equipment-case, in canvas	KFJ	1/06

Lenses (without panel)

Focusing scales are essential for hand-held exposures. We are able to provide these at appropriate cost on being informed of the correct focal length of the lens in question.

Lens panel 95x95 PJ 1/71

Standard Lenses

Xenar f/4.5, 105 mm in Compur 0
 Xenar f/3.5, 105 mm in Compur 0
 Symmar f/5.6, 105 mm in Compur 00
 Ysarex f/4.5, 105 mm in Compur 0

with extra-long focal length:

Anticomar f/4.2, 150 mm in Compur EX/CI AC 1/102
 Anticomar f/4.2, 150 mm in Compur MX/CRI AC 1/103
 Anticomar f/4.2, 210 mm in Compound III/7 AC 1/122
 Apo-Ronar f/9, 150 mm in Compur 00

Wide-angle Lenses

Angulon f/6.8, 65 mm in Compur 00 PJ 1/72
 Lens panel
 Super-Angulon f/8, 65 mm in Compur 00 PJ 1/71
 Lens panel
 Super-Angulon f/8, 47 mm in Compur 00 PJ 1/441
 Lens panel

Telephoto Lenses

Tele Arton f/5.5, 180 mm in Compur 0
 Tele Arton f/5.5, 240 mm in Compur I
 Rotelar f/4.5, 180 mm in Compur 0

Lenshoods, filters, handles and many other accessories obtainable from your photo-dealer.

In Preparation

Interchangeable slides, copying frames, universal optical viewfinders, micro-accessories, adaptors for police photography, etc.

Trust Compels Quality

- 5-Year guarantee
- Optical bench construction gets the best out of every lens.
- Existing lenses of any make can be fitted. Available aperture of frame 61 mm diam., lens panel 95 x 95 mm.
- All-metal construction gives maximum stability. All settings of sliding and moving parts easily adjustable.
- All controls fully visible.
- Adaptable for every type of photography thanks to abundant range of accessories. For example: full utilization of the f/8,65 mm Super-Angulon up to a 100° angle of view.
- Exchangeable bellows. Black or red leather bellows according to choice. Soft wide-angle bellows.



Used in more than 60 countries

**PLAUBEL FEINMECHANIK UND OPTIK
FRANKFURT/MAIN, W.-13**